REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED

MODEL IV-300 VIDEO SIGNAL ROTATOR
PART# 150001 P21VID

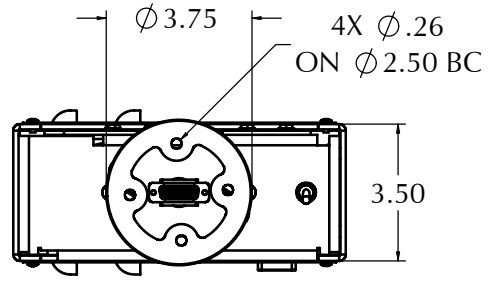

SPECIFICATIONS	
WEIGHT CAPACITY:	300 LBS.
AVAILABLE RPM SPEEDS:	1,2(STD),3,4,6
MOTOR DRAW:	0.1A (12W)
SAFETY CLUTCH:	YES

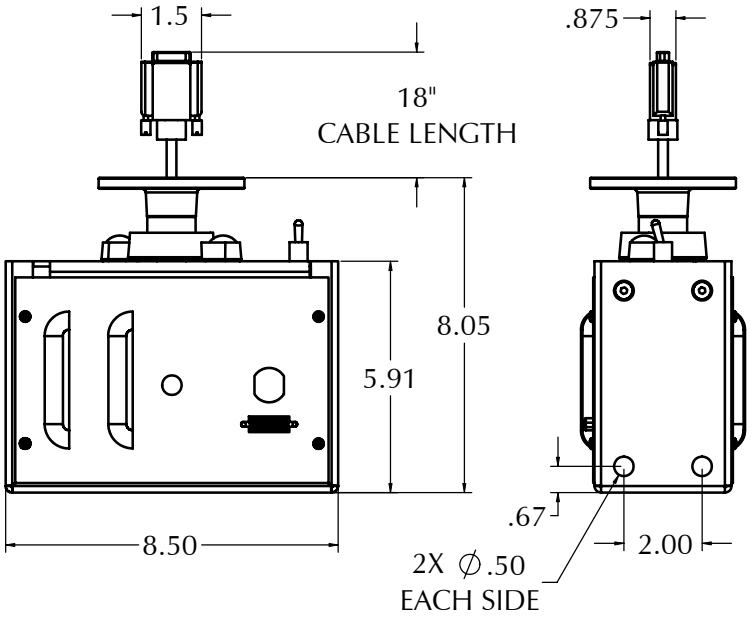

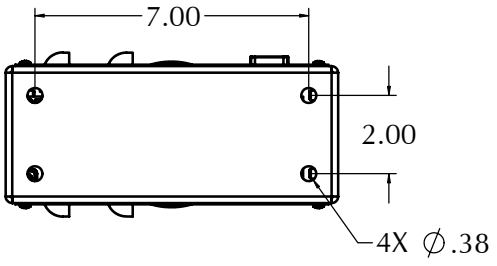

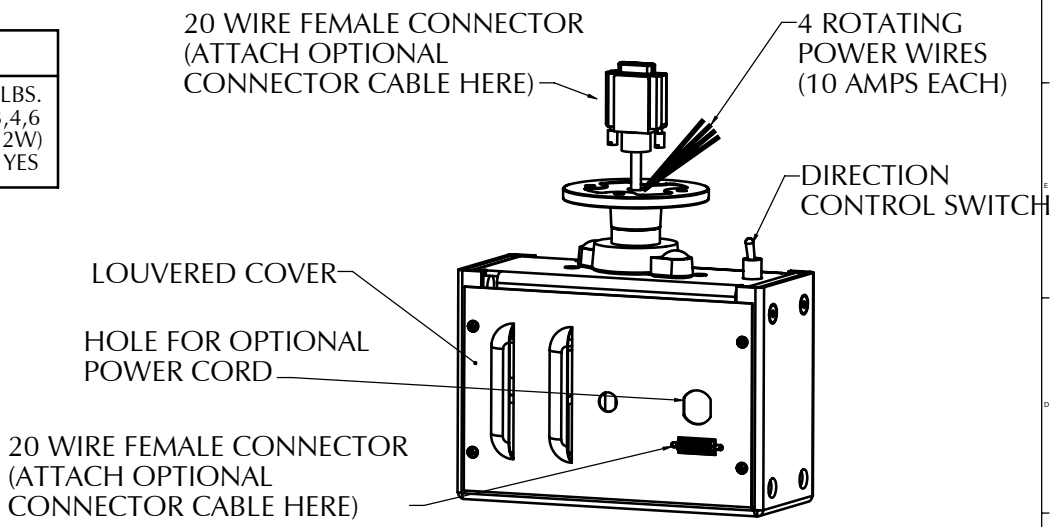

OPTIONAL CONNECTOR CABLES:

NOTE:
1. Two cables are required to transfer data
2. Input and Output cables must be same type or part #
3. Choose one of the cable types below:

561167 VGA/RCA CABLE SET (2 cables): Female VGA & 2 Female RCA connectors.

561168 DUAL CAT.5 CABLE SET (2 cables): 2 Female shielded CAT.5 connectors.

ADDITIONAL OPTIONS AVAILABLE:

661161 3' POWER CORD WITH MALE PLUG

DYNAPAC ROTATING CO.

IV-300 ROTATOR 24 WIRE VIDEO SIGNAL

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES. TOLERANCES: FRACTIONAL ± 1/32, ANGULAR ± 1°, DECIMAL .X ± .125, .XX ± .030, .XXX ± .010

MATERIAL | FINISH | APPLICATION | NEXT ASSY | USED ON

	APPROVALS	DATE
DRAWN	AMMON ENCE	01/02/08
CHECKED		
ENG APPR.		

DYNAPAC ROTATING CO.
SALT LAKE CITY, UTAH

SIZE D | DWG. NO. 150001 P21VID | REV. X-04

SCALE: 2:3 | SHEET 1 OF 1

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYNAPAC ROTATING CO. INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYNAPAC ROTATING CO. INC. IS PROHIBITED.
© COPYRIGHT DYNAPAC ROTATING CO. INC. ALL RIGHTS RESERVED