
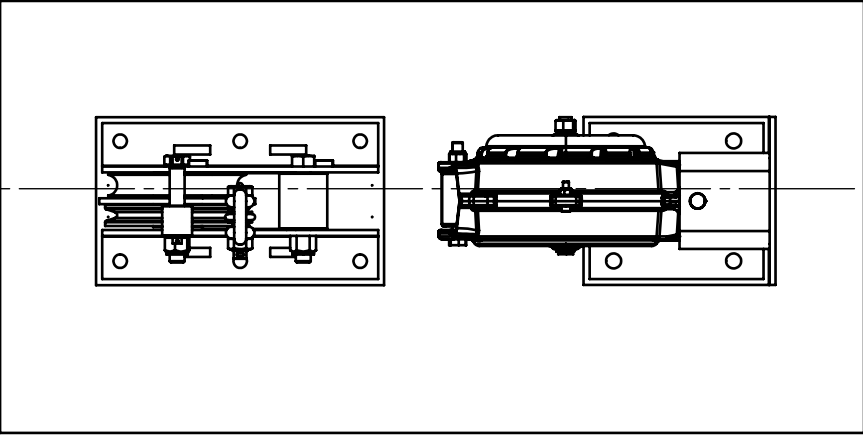
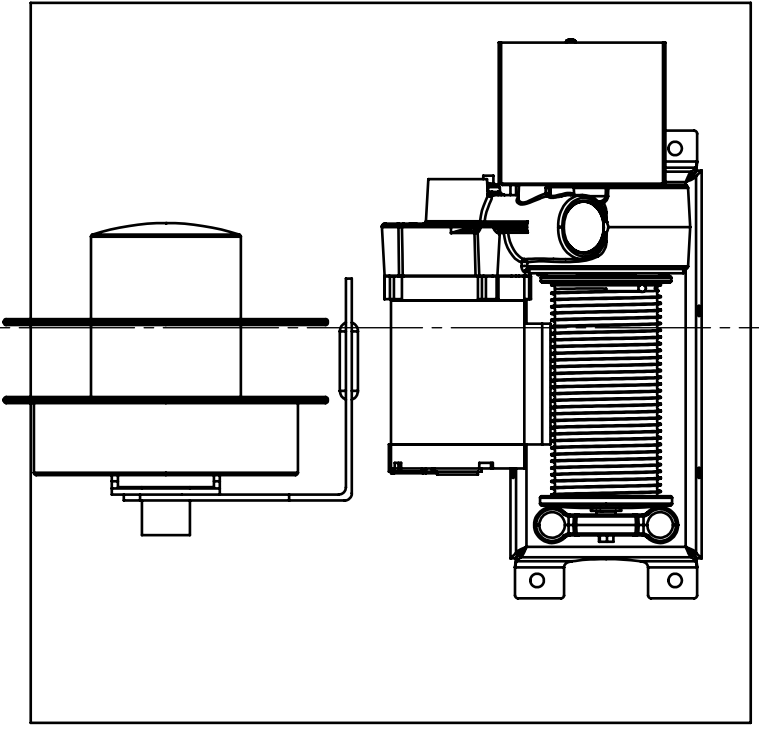


# CHANDELIER HOIST SYSTEM CONFIGURATION "A"

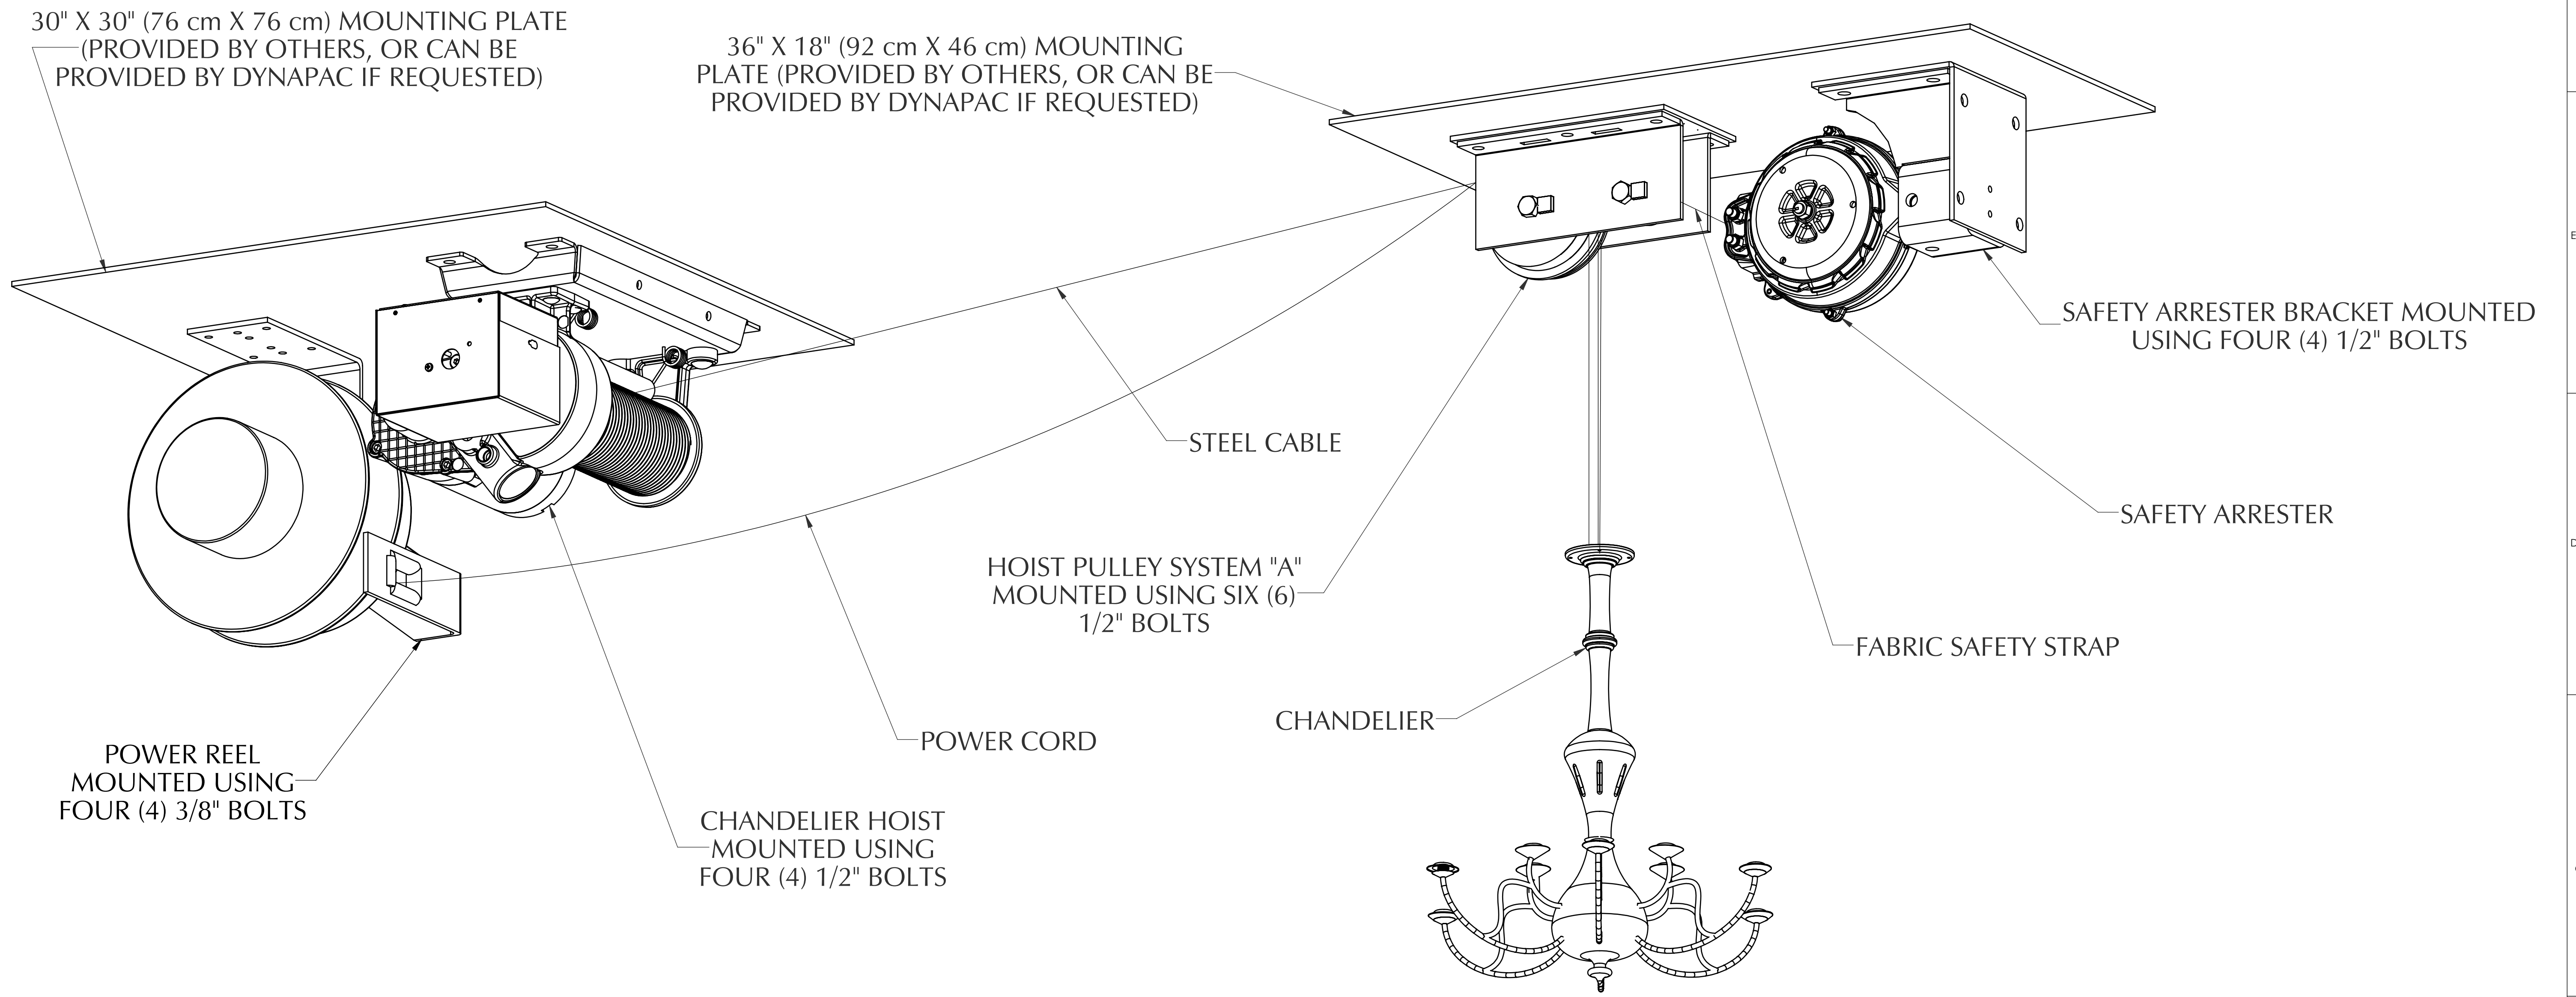

PLAN VIEW

- NOTES:
1. SYSTEM CAN BE PLATFORM (FLOOR) OR OVERHEAD (CEILING) MOUNTED, SPECIFY AT TIME OF ORDER.
  2. IF MOUNTING PLATES ARE TO BE IMBEDDED IN CEILING A 3" (8 cm) SPACE ABOVE PLATE IS REQUIRED TO INSTALL BOLTS THROUGH PLATES.
  3. FLEET ANGLE FOR "ANY" PART OF SYSTEM SHOULD NOT EXCEED 2°.
  4. FOR EVERY 12' (3.7m) OF VERTICAL DROP, HOIST SHOULD BE 6' (1.8m) AWAY FROM PULLEY SYSTEM.

MAX WEIGHT CAPACITY: 1000 LB (453 KG)

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	APPROVALS	DATE	DYNAPAC ROTATING CO. SALT LAKE CITY, UTAH
	DRAWN ALEX CAMPBELL	3/14/17	
TOLERANCES:	CHECKED		
FRACTIONAL ± 1/32			
ANGULAR ± 2°			
DECIMAL .XX ± 0.00 .XXX ± 0.010	ENGR. APPR.		
MATERIAL	APPLICATION	SIZE	DWG. NO.
FINISH	NEXT ASSY		REV
	FINAL ASSY	SCALE: 1:4	CHANDLIER HOIST CONFIGURATION X-03
			SHEET 1 OF 4

PROPRIETARY AND CONFIDENTIAL  
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYNAPAC ROTATING CO., INC. ANY REPLICATION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYNAPAC ROTATING CO., INC. IS PROHIBITED.  
COPYRIGHT DYNAPAC ROTATING CO., INC. ALL RIGHTS RESERVED