


CHANDELIER HOIST SYSTEM CONFIGURATION "C"

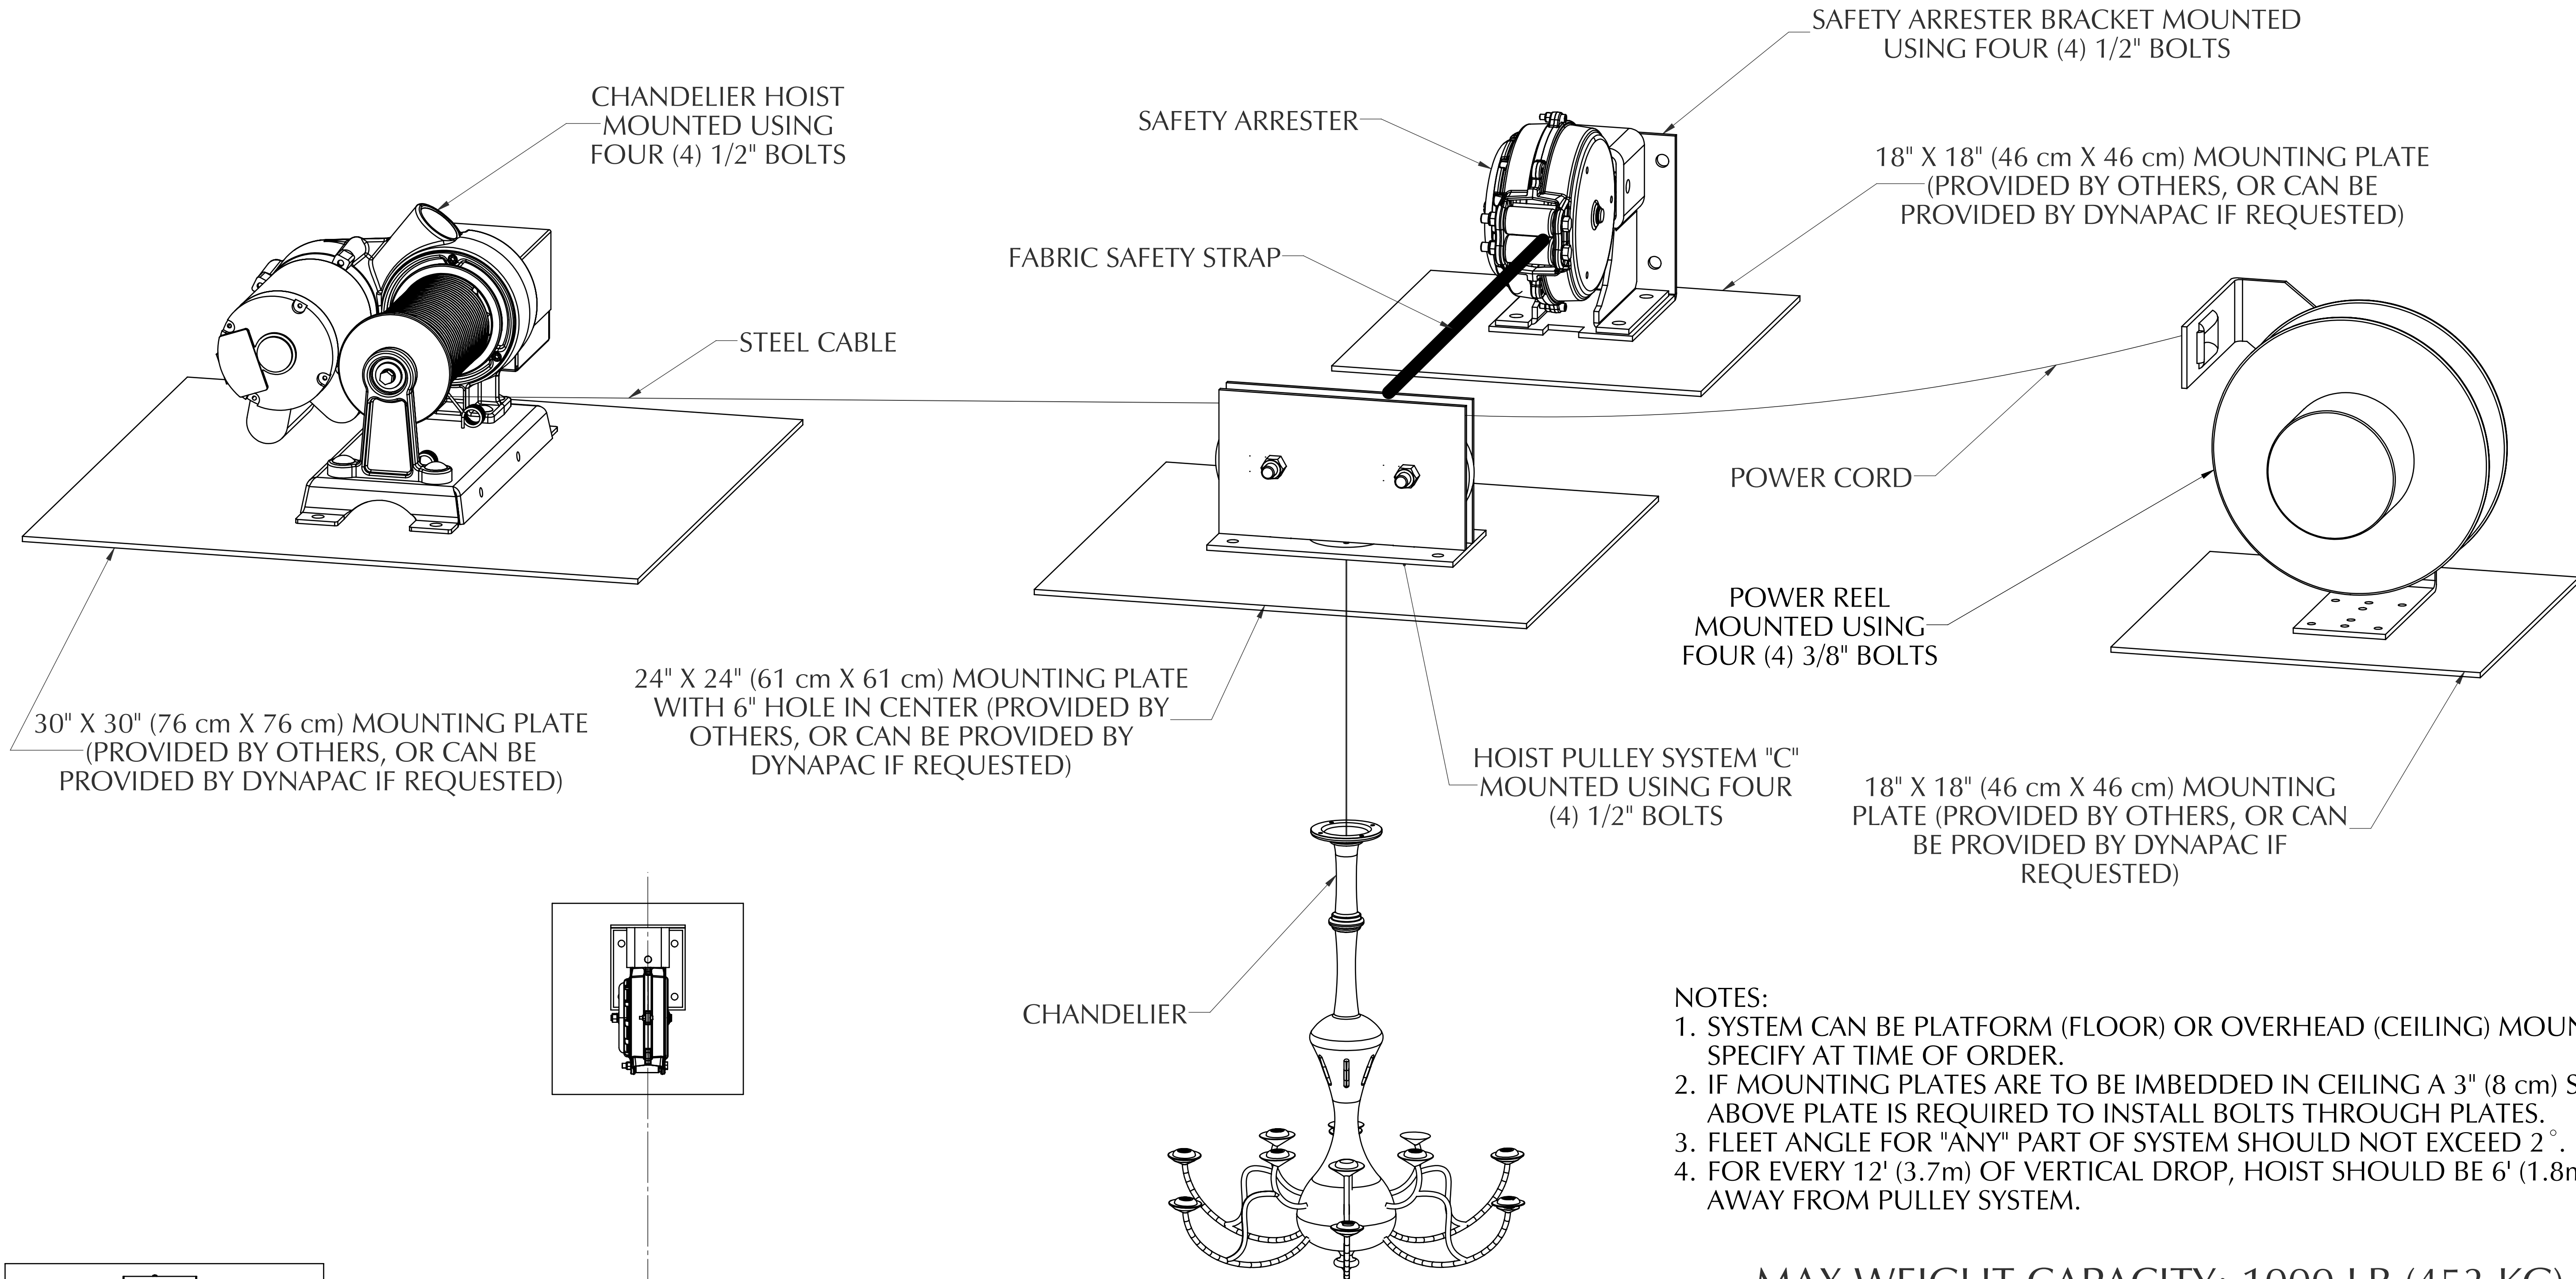

- NOTES:**
1. SYSTEM CAN BE PLATFORM (FLOOR) OR OVERHEAD (CEILING) MOUNTED, SPECIFY AT TIME OF ORDER.
 2. IF MOUNTING PLATES ARE TO BE IMBEDDED IN CEILING A 3" (8 cm) SPACE ABOVE PLATE IS REQUIRED TO INSTALL BOLTS THROUGH PLATES.
 3. FLEET ANGLE FOR "ANY" PART OF SYSTEM SHOULD NOT EXCEED 2°.
 4. FOR EVERY 12' (3.7m) OF VERTICAL DROP, HOIST SHOULD BE 6' (1.8m) AWAY FROM PULLEY SYSTEM.

MAX WEIGHT CAPACITY: 1000 LB (453 KG)

PLAN VIEW

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		APPROVALS	DATE	DYNAPAC ROTATING CO. SALT LAKE CITY, UTAH
TOLERANCES:		ALEX CAMPBELL	5/16/16	
FRACTIONAL	± 1/32	CHECKED		
ANGULAR	± 2"	ENG. APPR.		
DECIMAL	.XX ± 0.00 .XXX ± 0.010	FINISH ASSY		
MATERIAL		APPLICATION	SIZE	DWG. NO.
FINISH		NEXT ASSY	D	CHANDELIER HOIST CONFIGURATION
SCALE: 1:4			SHEET 1 OF 4	REV X-25

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF DYNAPAC ROTATING CO., INC. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF DYNAPAC ROTATING CO., INC. IS PROHIBITED.
COPYRIGHT DYNAPAC ROTATING CO., INC. ALL RIGHTS RESERVED.